



Uponor Vario S manifold FM 14xG3/4 Euro - G1

1140845

- Supply beam with flowmeters for balancing and shutoff, with memory ring
- Return beam with valves for shutoff, with hand caps
- With primary connection G1

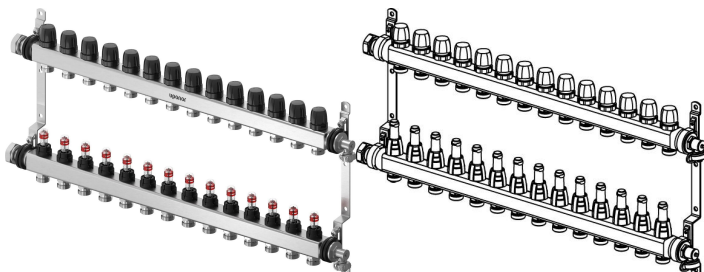

About Uponor Vario S manifold FM

Specification


- Made of stainless steel, with integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill & drain points in supply/return
- Loop connection G3/4" Eurocone c-c 50 mm
- Header pitch 215 mm
- Compatible with pump group Item No.1094185
- Actuator 230v Item No. 1141676
- Actuator 24v Item No. 1141677

Application

- For underfloor-heating and -cooling
- Max. pressure: 6 bar at 60°C

Uponor Vario S manifold FM 14xG3/4 Euro - G1

1140845

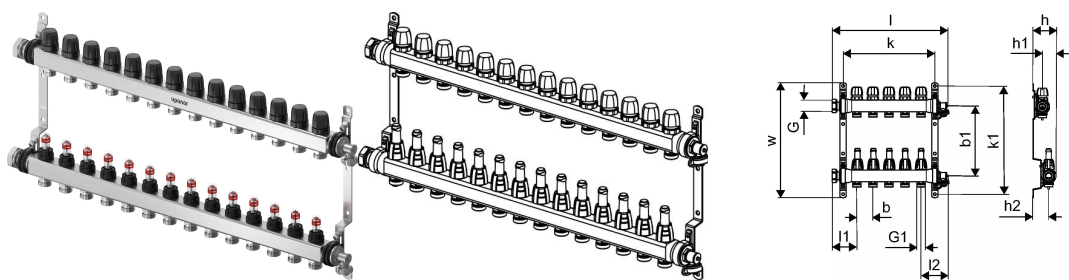

Status

Item Available From date	2024-05-01
Until stocks last	Until stocks last

Product code

Item no EAN	6414900440523
Item no GF	35001140845
Item no GTIN	06414900440523

Dimensions

Item Unit Height	40
Item Unit Length	810
Item Unit Weight	8
Item Unit Width	235
Item_UOM	pce

Measurements

LENGTH_L	814
Length (l1)	77
Length (l2)	87
Z Measurement b	50
Z Measurement b1	217
Z Measurement h	73
Z Measurement h1	30
Z Measurement h2	50
Z Measurement k	735
Z Measurement k1	336
Z Measurement w	357

Packaging

Packaging GTIN PL1	06414900500845
Packaging GTIN PL4	06414900501330

Packaging Height PL1	47
Packaging Height PL4	996
Packaging Length PL1	967
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	36
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,014452782
Packaging Volume PL4	0,95616
Packaging Weight PL1	8,2
Packaging Weight PL4	320
Packaging Width PL1	318
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E
customerservice.uk.bfs@georgfi
scher.com